


materials + components

HOW-TO



pull... ...hook... ...lock... ...walk

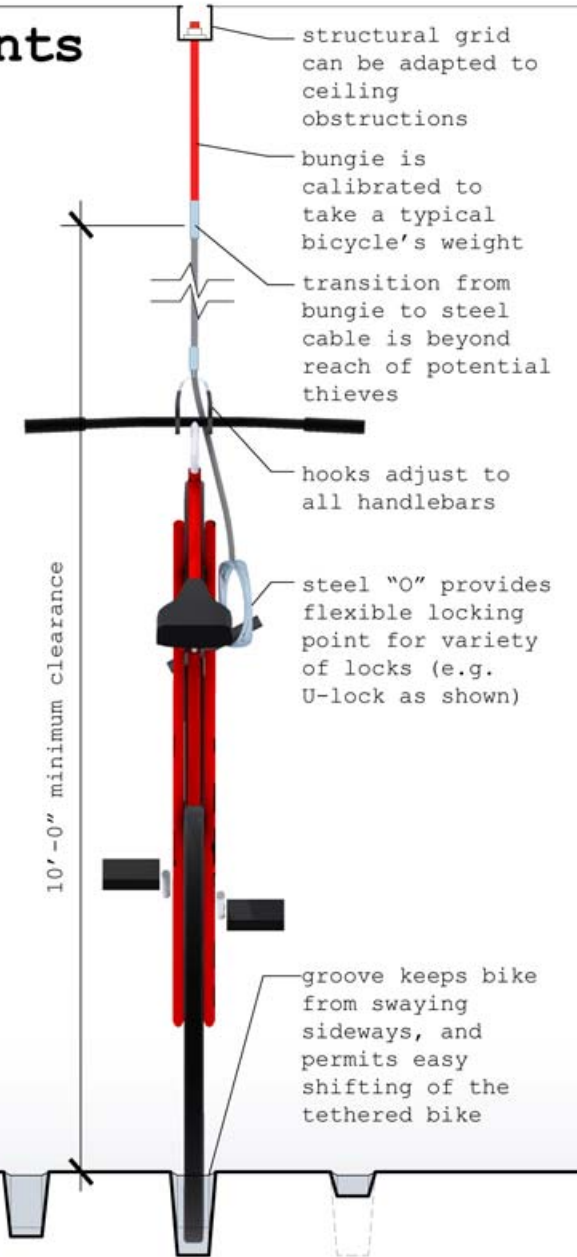

structural grid
can be adapted to
ceiling
obstructions

bungie is
calibrated to
take a typical
bicycle's weight

transition from
bungie to steel
cable is beyond
reach of potential
thieves

hooks adjust to
all handlebars

steel "O" provides
flexible locking
point for variety
of locks (e.g.
U-lock as shown)

10'-0" minimum clearance

groove keeps bike
from swaying
sideways, and
permits easy
shifting of the
tethered bike

